


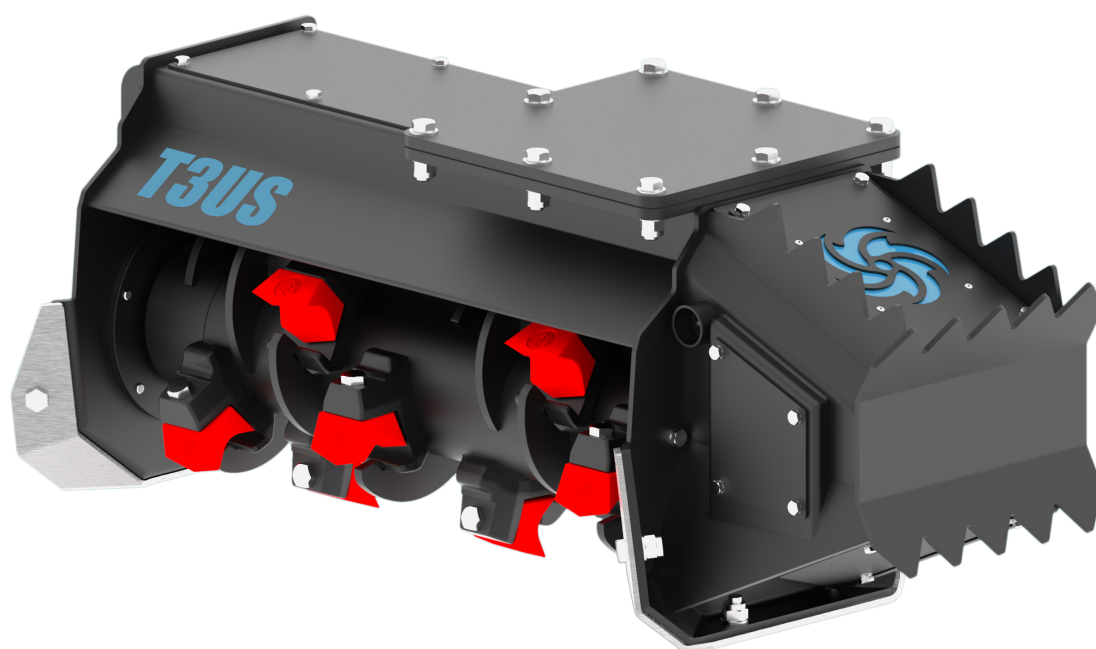

T3 US

For excavators
2.5-7.0 ton

SPECIFICATIONS


		T3US DFD50	T3US DFD75	T3US DFD100
ton		2.5-4.0	4.0-5.5	5.5-7.0
cm inch		50 20	75 30	100 40
cm inch		86x43x45 34x17x18	111x43x45 44x17x18	136x43x45 54x17x18
kg lbs		170 374	200 440	230 506
cc		12	16	20
L/min gal/min		35 9	45 12	55 15
bar (min-max) psi (min-max)		180-250 2.600-3.600	180-250 2.600-3.600	180-250 2.600-3.600
transmission		direct	direct	direct
rotor diameter cm inch		32 13	32 13	32 13
tools		10	14	18

DFD



STANDARD EQUIPMENT

HF22
Ø max 12 cm (5")



TECHNICAL FEATURES AND STANDARD EQUIPMENT

- » Direct transmission
- » Internally reinforced with double metal sheet
- » Two rows forged and hardened counter-blades
- » Funnel-shaped frame for higher cutting capacity
- » Fixed thumb bracket built into the frame
- » interchangeable side skids
- » Helicoidal DFD Rotor, double edge fixed teeth with bite limiter
- » Internally reinforced double-case body with interspace
- » Front hood delete. Fully unrestricted rotor for increased cutting capacity
- » Inside Rotor Supports with "labyrinth" for the protection of the bearings from the impurities
- » Double Row roller adjustable bearings of 1st quality
- » Valves block complete with priority valve for adjusting oil flow, anti-shock valve (pressure relief valve), anti-cavitation
- » Cast iron gear motor
- » Protective cover for motor



ACCESSORIES

- » Mounting hitch (pins version) 1.2-4.0 ton
- » Pins kit 1.2-4.0 ton
- » Quick hitch 1.2-4.0 ton (Klac, Came, Lehnhoff, Cangini)
- » Mounting hitch (pins version) 4.1-8.0 ton
- » Pins kit 4.1-8.0 ton
- » Quick hitch 4.1-8.0 (Klac, Came, Lehnhoff, Cangini)
- » Hoses kit Lg. 2 meters
- » Self-levelling support (+40 kg / 88 lbs)



HYDRAULIC MOTOR RANGE

	ton	2.5-4.0	4.0-5.5	5.5-7.0
	cc	12	16	20
	L/min gal/min	35 9	45 12	55 15